


SPECIFICATIONS

Model				KX033-4	KX033-4 Angle Blade	
Arm				Standard		
Type of ROPS / OPG (TOP Guard, Level I)				Canopy / Cab		
Type of tracks				Rubber / Steel		
Engine	Model			Kubota D1703M-DI-E4		
	Output (SAE J1995 gross)	HP (kW) / rpm		23.3 (17.4) / @2200		
	Output (SAE J1349 net) Canopy / Cab	HP (kW) / rpm		22.4 (16.7) / 22.3 (16.6) / @2200		
	Displacement	cu. in. (cc)		100.5 (1647)		
Dimensions	Overall length	ft. in. (mm)		15'6" (4730)		
	Overall height	ft. in. (mm)		8'1" (2480) / 8'1" (2470)		
	Overall width	ft. in. (mm)		5'1" (1550)		
	Min. ground clearance	in. (mm)		11.4 (290)		
	Boom offset	Right / Left	ft. in. (mm)		1'4.1" (410) / 1'5.7" (450)	
	Blade lift	Upper / Low	ft. in. (mm)		1'2.4" (365) / 1'2.8" (375)	
Hydraulic system	Pump capacity	GPM (ℓ/min)		10.5 (39.6) x 2 / 5.5 (20.9) x 1		
	Auxiliary hydraulic flow	GPM (ℓ/min)		15.8 (60)		
	Max. breakout force	Bucket / Arm	lbs. (kgf)	8138 (3694) / 3867 (1756)		
Drive system	Travel speed	Low / High	mph (km/h)	1.9 (3.0) / 2.9 (4.6)		
	Max. traction force	Low speed	lbs. (kgf)	6091 (2763)		
	Tumbler distance		ft. in. (mm)	5'5.6" (1665)		
	Crawler length		ft. in. (mm)	6'10.6" (2100)		
	Shoe width	Rubber / Steel	in. (mm)	11.8 (300)		
	Ground contact pressure*2	Canopy Rubber / Steel	psi (kgf/cm ²)	4.365 (0.307) / 4.482 (0.315)	4.583 (0.322) / 4.700 (0.331)	
	Cab Rubber / Steel	psi (kgf/cm ²)	4.559 (0.321) / 4.676 (0.329)	4.776 (0.336) / 4.894 (0.344)		
Swing system	Unit swing speed		rpm	8.9		
	Boom swing angle	Left / Right	degree	70 / 48		
Blade	Dimensions	Width	ft. in. (mm)	5'1" (1550)		
		Height	ft. in. (mm)	1'1.5" (345)	1'3.2" (385)	
	Max. lift above ground		in. (mm)	14.4 (365)	15.9 (405)	
	Max. drop below ground		in. (mm)	14.8 (375)	18.9 (480)	
Angle	Left / Right	degree	-	25 / 25		
Hydraulic oil (Reservoir / System)		gal (ℓ)	11.8 (44.6) / 16.1 (61)			
Fuel reservoir		gal (ℓ)	12.4 (46.9)			
Operating weight*1 (Including operator's weight @ 165 lbs.)	Canopy Rubber / Steel	lbs. (kgf)	7420 (3365) / 7616 (3454)	7781 (3529) / 7978 (3618)		
	Cab Rubber / Steel	lbs. (kgf)	7742 (3511) / 7938 (3600)	8104 (3675) / 8300 (3764)		

*1 Operating weight will increase 440lbs. (200kg) when extendable arm is equipped.
 *2 Ground contact pressure will increase 0.265 psi when extendable arm is equipped.

DIMENSIONS

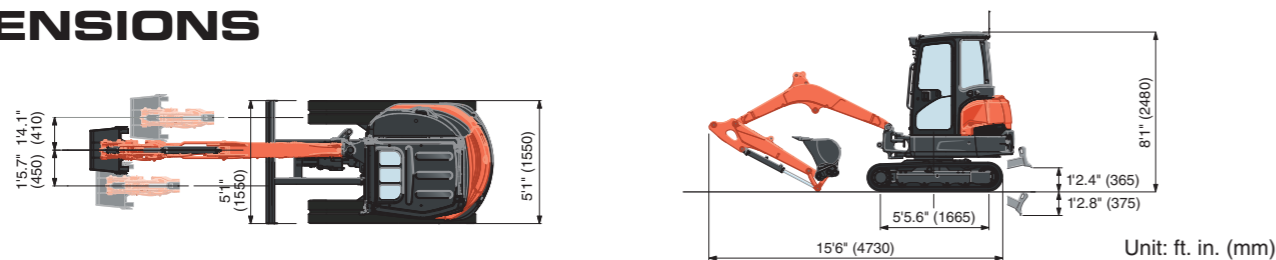

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

Kubota
KUBOTA TRACTOR CORPORATION
 1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
 Visit our web site at: www.kubotausa.com

©2024 Kubota Corporation



Kubota Genuine Parts
 for excellent performance, durability and safety



For Earth, For Life
Kubota

KX

KUBOTA COMPACT EXCAVATOR KX033-4

Designed for efficiency, built for stability, and created for comfort, the new KX033-4 redefines the compact excavator.

