


SPECIFICATIONS

Model		KX080-5		KX080-5 Angle Blade	
Type of cabin		ROPS / OPG (TOP Guard, Level I)			
Type of tracks		Rubber / Steel			
Engine	Model		Kubota V3307-CR-TE5		
	Output (SAE J1995 gross)	HP (kW)/rpm	66.6 (49.7) / 2000		
	Output (SAE J1349 net)	HP (kW)/rpm	62.3 (46.5) / 2000		
	Displacement	cu. in. (cc)	203.3 (3331)		
Dimensions	Overall length	ft. in. (mm)	21'1.9" (6450)		
	Overall height	ft. in. (mm)	8'4" (2540)		
	Overall width	ft. in. (mm)	7'2.6" (2200)		
	Min. ground clearance	in. (mm)	14.0 (355)		
Hydraulic system	Pump capacity	GPM (ℓ/min)	22.3 (84.6) Variable × 2		
	Auxiliary hydraulic flow	GPM (ℓ/min)	26.4 (100) / 14.7 (55.8)		
	Max. breakout force	Bucket / Arm	lb. (kgf)	14660 (6650) / 8554 (3880)	
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.7) / 3.0 (4.8)	
	Max. traction force	Low speed	lb. (kgf)	15062 (6832)	
	Tumbler distance		ft. in. (mm)	7'6.6" (2300)	
	Crawler length		ft. in. (mm)	9'6.2" (2900)	
	Shoe width	Rubber / Steel	in. (mm)	17.7" (450) / 17.7" (450) (opt. 24" (610))	
	Ground contact pressure	Rubber / Steel	psi (kg/cm ²)	5.29 (0.372) / 5.35 (0.376)	5.56 (0.391) / 5.60 (0.394)
Swing system	Unit swing speed		rpm	9.8	
	Boom swing angle	Left / Right	degree	67 / 60	
Blade	Dimensions	Width	ft. in. (mm)	7'2.6" (2200)	
		Height	ft. in. (mm)	19.7" (500)	20.1" (510)
	Max. lift above ground		in. (mm)	19.7" (500)	
	Max. drop below ground		in. (mm)	19.7" (500)	
Angle		degree	— / 25		
Hydraulic oil (reservoir / system)			gal (ℓ)	19.8 (75) / 38.6 (146)	
Fuel reservoir			gal (ℓ)	30.4 (115)	
Operating weight (Including operator's weight @ 165 lbs.)		Rubber / Steel	lbs. (kg)	18520 (8400) / 18760 (8510)	19470 (8830) / 19620 (8900)

DIMENSIONS

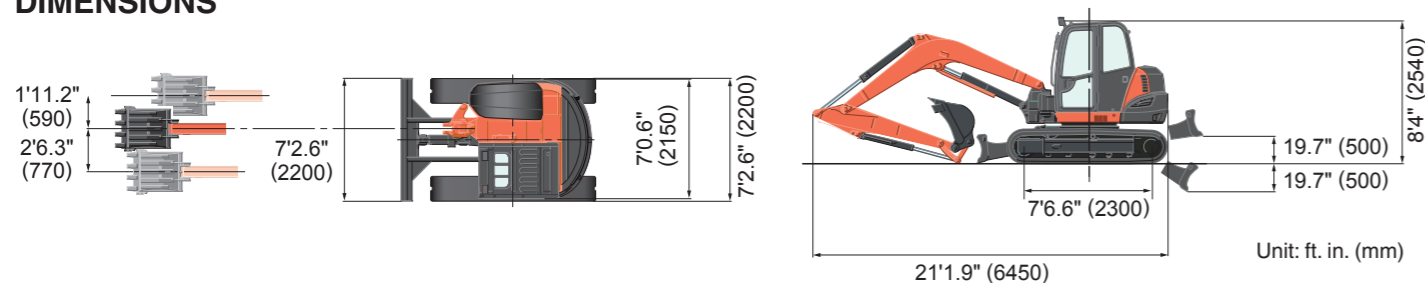

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

Kubota

KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2025 Kubota Corporation



Kubota Genuine Parts
for excellent performance, durability and safety



Cat. No.8991C-01-US Printed in Japan '25-09D.



For Earth, For Life
Kubota

KX

KUBOTA POWER UTILITY EXCAVATOR KX080-5

Powerful and easy to operate, the KX080-5 with the updated features makes it an excellent choice for your power utility excavation jobs.



AB

FLOAT ANGLE BLADE