


Specifications

| | | | | |
|---|---|-----------------------------|----------------------------|-------------|
| Model | | SVL65-2S | | |
| Type of operator station | | Open CAB / Closed CAB | | |
| Engine | Model | V2607-CR-TE4 | | |
| | Output (SAE J1995 gross) | HP (kW)/rpm | 68.4 (51.0) / 2600 | |
| | Output (SAE J1349 net) | HP (kW)/rpm | 59.9 (44.7) / 2600 | |
| | Displacement | cu.in. (cc) | 159.6 (2615) | |
| | Cylinders | | 4 | |
| | Bore × Stroke | in. (mm) | 3.4 (87) × 4.3 (110) | |
| | Aspiration | | Turbocharged | |
| Loader Performance | Rated operating capacity-35% tipping load | lbs. (kg) | 2100 (953) | |
| | Rated operating capacity-50% tipping load | lbs. (kg) | 3000 (1361) | |
| | Tipping load | lbs. (kg) | 6000 (2722) | |
| | Breakout force | Bucket | lbf. (kg) | 4614 (2093) |
| | | Lift arm | lbf. (kg) | 4266 (1935) |
| | Lift arm path | | Vertical | |
| Undercarriage | Track Width | Standard | in. (mm) | 12.6 (320) |
| | | Wide | in. (mm) | 15.0 (380) |
| | Ground pressure | Standard | psi | 5.0 / 5.2 |
| | | Wide | psi | 4.3 / 4.5 |
| | Track rollers (per side) | | 4 | |
| | Travel speed | Low | mph (km/h) | 4.9 (7.8) |
| | | High | mph (km/h) | 7.1 (11.5) |
| | Traction force | lbf. (kgf) | 8406 (3813) | |
| Min. ground clearance | in. (mm) | 9.2 (233) | | |
| Hydraulic system | Aux. hydraulic flow | Std./High Flow gpm (ℓ/min.) | 17.4 (65.8) / 27.0 (102.2) | |
| | Aux. hydraulic pressure | psi (kgf/cm ²) | 3271 (230) | |
| Service refill capacities | Hydraulic system | gal. (ℓ) | 12.7 (48) | |
| | Hydraulic tank | gal. (ℓ) | 5.3 (20) | |
| | Fuel tank | gal. (ℓ) | 21.7 (82) | |
| Operating weight (Includes operator weight 165lbs.) | | lbs. (kg) | 8135 (3690) / 8631 (3915) | |

Dimensions

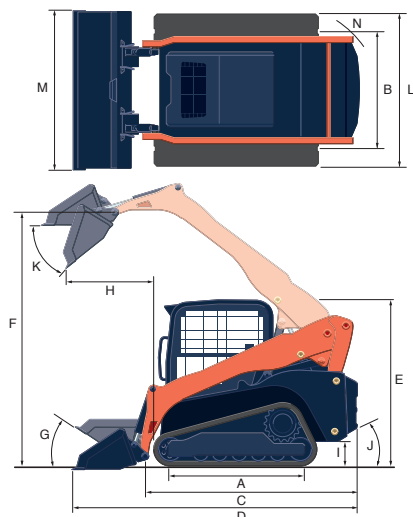

| | | | |
|-------|---|----------|---------------------------|
| Model | | SVL65-2S | |
| A | Length of track on ground | in. (mm) | 57.9 (1470) |
| B | Track gauge | in. (mm) | 52.6 (1337) |
| C | Length w/o bucket | in. (mm) | 107.3 (2725) |
| D | Length w/bucket on ground | in. (mm) | 136.4 (3465) |
| E | Height to top of cab | in. (mm) | 79.9 (2029) |
| F | Bucket hinge pin height at max. lift | in. (mm) | 118.5 (3010) |
| G | Rollback angle at carry position | degree | 30 |
| H | Reach at max. lift and dump | in. (mm) | 34.9 (886) |
| I | Ground clearance | in. (mm) | 9.2 (233) |
| J | Departure angle | degree | 30 |
| K | Max. dump angle | degree | 40 |
| L | Vehicle width Standard track / Wide track | in. (mm) | 65.2 (1657) / 67.6 (1717) |
| M | Width with bucket | in. (mm) | 68 (1727) / 74 (1880) |
| N | Turning radius from center-machine rear | in. (mm) | 57.1 (1451) |

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2026 Kubota Corporation



For Earth, For Life
Kubota

SVL

KUBOTA COMPACT TRACK LOADER SVL65-2S

Kubota's powerful and productive Compact Track Loader for those big jobs in small places.

